



A3 Monochrome Multifunction Printer

Apeos 5570 / 4570



Hello to the future of work

The “Apeos” series offers advanced features with high security level and easy operability to help business diversify with times.




Quick and simple operability



High performance for greater work efficiency



Safeguard important information



Initiatives for environmental consideration

Equipped with easy-to-use interface and strong security features to create seamless remote work culture

Apeos 5570 / 4570

Copy/Print	Scan	Printing Resolution	Control Panel	Environmental Technology
5570 55 ppm ^{*1} 4570 45 ppm ^{*1}	Color/Monochrome 160ppm ^{*2}	1,200 × 2,400 dpi	10.1 inches	LED printhead Super EA-Eco toner

•Mobile supported •Wireless LAN supported •Scan business cards •Security •LED reminder to collect printed document / originals
•Multi-feed detection


*1: A4 LEF. *2: When both sides of a sheet are scanned through a single pass using the Duplex Automatic Document Feeder.

Quick and simple operability

Simple layout with easy navigation

Black and gray tone UI gives better contrast for easy recognition.

- Icons are evenly spread for easy recognition
- Consistent operation steps of each function for easy recall
- Home screen personalization for ease of access to commonly used functions
- Pin regular settings for registering frequent or repeated jobs
- Clear visible light notifications for completed or error jobs
- Subtle sound notification for alert and attention

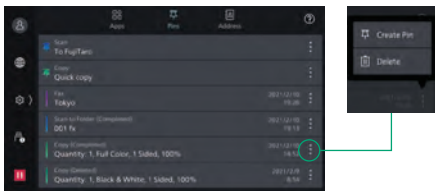

Light notification reminder

Light notification reminds user of uncollected original or printed document on the trays.

- Prevents uncollected documents left on the Center Tray or feeder
- Center Tray light further notifies when a fax is received on the Side Tray



Accelerated operations with no wait time

Quick startup and output for greater efficiency.

- Quick warm up in less than 24 seconds
- Fast Boot Mode prepares the operation panel in 6 seconds*¹
- First Copy Output Time in 3.6 seconds*²

*1: Depending on the status of the main unit and configuration of options, it may not operate or take more than 6 seconds.

*2: A4 LEF when in horizontal/Monochrome preferred mode.

Flexibility in office layout

Supports wireless LAN environment*¹.

- Supports free addressing in the office with Wi-Fi support
- Up to five Wi-Fi Direct multifunction devices can be connected at the same time
- Supports direct mobile printing*²
- Print Utility, AirPrint, and Mopria® Print Service are supported

*1: Optional.

*2: When connecting to Wi-Fi Direct.

Smartphone becomes a “portable operation panel”

Seamless connectivity with mobile devices for Copy, Fax, Print, Scan*² jobs using the Print Utility*¹ application.

- Mobile device can be used as an alternative UI for operations control to minimise common touch points
- Frequent settings can be saved as “Favourites”
- Directly send fax or email with the addresses stored in the smartphone
- Minimise printer touch points for hygiene reasons

Note: Connect to machine via wireless environment or Wi-Fi direct connection.

*1: It can be downloaded free of charge from Google Play™ or App Store.


*2: E-mail, Scan to Folder.



Trays open and close lightly and quietly

Paper trays are equipped with a retraction mechanism for smooth opening and closing.

- One soft push for closing
- Retracts softly and gently
- Drawing out is effortless

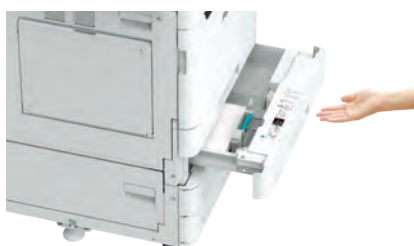



High performance for greater work efficiency

Quick scanning of high-volume originals

Up to 160ppm* can be read at high speed in Copy or Scan. The post-processing jobs can be carried out without delay.


- Equipped with multifeed detection
- One pass DADF will not damage the original document
- The document cover closes slowly

* For Duplex Automatic Document Feeder B2-PC.
During 1 pass and 2 sided scanning, 200 dpi to Folder.

Scan small originals such as checks and invoices together

Custom-size or small-size documents such as receipts can be scanned directly from the Duplex Automatic Document Feeder which can be automatically set into the nearest standard size.

- Instantly scan without manual entry of each original size
- Automatically converts custom-size originals to standard size
- Smart OCR function reduces post-processing work

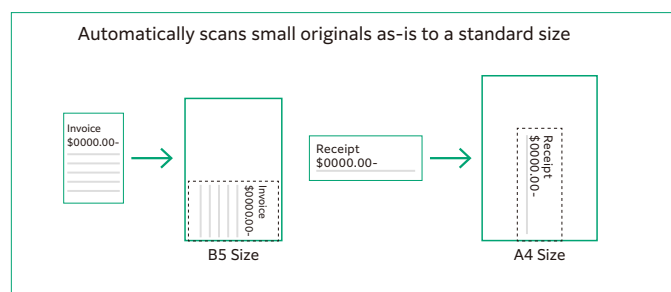

Enhance sales capabilities by utilising business card information

With Duplex Automatic Document Feeder B2-PC, you can load originals that are as small as business cards.

- Supports minimum size of 49mm(W) x 85mm(L)*
- Multiple sheets of original can be loaded and scanned together
- 1-pass 2-sided DADF allows simultaneous front and back side scanning
- OCR feature reduces workload of manual data entry

* Applicable for paper weight 38 to 209 gsm.



Various features saving time and effort in scanning operation

Scanned data can be transferred through a variety of methods including Email, URL, and send to PC (SMB/FTP/SFTP).

- Data can be sent by using multiple features simultaneously
- Improve your digitalisation process with features including automatic orientation of scanned page to upright position, correcting the skewed page, or removing blank pages
- In addition to TIFF and JPEG, the scanned data can be converted to PDF with searchable OCR enabled

Safeguard important information

Information is an important asset which should be protected at all cost

Protect from unauthorised user

Multiple options of setting user authorisation allow administrator to select a right combination as per given environment.

- Local Authentication
- Authentication by Remote Server
- IC Card Authentication*
- User-specific feature access
- Private Charge Print

* Optional.

Additional layer of unwanted access can be created for specific users. (e.g. guests).

- Secondary Ethernet Kit*

* Optional.

Protects Data

Protects against any malicious intent of hacking, tampering with device / system settings.

- Encryption of stored data
- Uses TPM* 2.0 chip for encryption key management
- Deletes settings and document information all at once

* Trusted Platform Module.

Protects the information by means of strong encryption while transferring it between devices, servers etc.

- Encryption of communication paths by SSL/TLS or IPsec
- Encryption when transferring via SMBv3 and SFTP
- Scan file encryption/signature
- Email encryption and signature by S/MIME
- TLS version limit
- Elliptic curve cryptography
- WPA3

Protect from unauthorised access

Protects device settings at multiple levels by clearly demarking change restrictions for different target audience - End users, IT administrators and Service Engineers.

- Service representative operation restriction
- Account lock to prevent unauthorised access
- Information for changing the default password
- Warnings displayed when using global IP address

Prevents unauthorised program from installing without notice. Robust IT audits are supported with device data logs for easy tracking.

- Software signature verification
- Remote update restrictions
- IP address filtering
- Tampering detection at startup and automatic restoration when tampering is detected
- Prevention of tampering during operation
- Audit log
- Audit log system transfer

Prevents operation errors

Prevents information leakage due to inadvertent mistakes by administrators and users.

- Scan documents to be delivered to fixed destination
- Re-enter fax recipient
- Annotations
- Watermark

Initiatives for environmental consideration



We are working to develop environmentally conscious products, including technologies that reduce the power consumption of multifunction devices and printers to achieve lower environmental impact. Fujifilm Group introduced the certification program in which we clarify the environmental value of each product by assessments at the time of product development, conduct the evaluation based on our in-house certification criteria and certify the products* that are excellent in reducing environmental impact as "Green Value Products". This product was certificated as a "Gold" rank product that contributes to reduction of environmental impact at industries' highest level.

* Products and services excellent in reducing environmental impact are those designed in consideration of environmental impact throughout their life cycle from acquisition of raw materials, production, usage, disposition, to reuse.

Initiatives for energy conservation

- Achieve both energy conservation and customer convenience by adopting IH fusing technologies that enable quick heating to eliminate the necessity of preheating in standby or power-saving mode
- Achieve both high image quality and energy conservation by equipping the LED printhead that enables space and energy saving design, as well as Super EA-Eco toner that has low-temperature fusing performance

- Reduce the power consumption with the smart power saving feature that solely powers on the required parts according to the functions being used by customers

Initiatives for resources conservation

- Functions contributing to paper consumption reduction - Private Charge Print, Scan, Paperless Fax, Pages per Side/Multiple-Up etc.

Apeos 5570 / 4570

Functions & Specifications

Basic Specifications / Copy Function

Item	5570	4570
Type	Console	
Memory capacity	4 GB (Max: 4 GB)	
Storage Device Capacity* ¹	128 GB	
Scan Resolution	600 x 600 dpi	
Printing Resolution	600 x 600 dpi (Text / Text-Photo / Photo / Map)	
Warm-up Time	[Embedded Plug-ins / Custom Services] * ² When enabled: 30 seconds or less (23 degrees Celsius room temperature) When disabled: 24 seconds or less (23 degrees Celsius room temperature)	
Recovery Time (Recovery Time from Sleep mode)	11 seconds or less (23 degrees Celsius room temperature)	
Original Size	Maximum of A3, 11 x 17", 297 x 432 mm for both Sheet and Book	
Paper Size	Max	SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 [12 x 19" (305 x 483 mm), 320 x 483 mm / 12.6 x 19.1" when using Bypass Tray]
	Min	A5, Postcard (100 x 148 mm) [89 x 98 mm / 3.5 x 3.9" when using Bypass Tray]
	Image loss width* ³	Lead edge 4.0 mm, Trail edge 2.0 mm, Right / Left edge 2.0 mm
Paper Weight* ⁴	Paper Tray	52 to 300 gsm / 14 lb. bond to 111 lb. cover
	Bypass Tray	52 to 300 gsm / 14 lb. bond to 111 lb. cover
First Copy Output Time	3.6 sec. (A4 LEF) 3.7 sec (Letter LEF)	
Continuous Copy Speed* ⁵	A4 LEF	55 ppm
	Letter LEF	55 ppm
	JIS B5 LEF	55 ppm
	A4 / JIS B5	40 ppm
	Legal	32 ppm
	JIS B4	32 ppm
	A3	27 ppm
Paper Tray Capacity* ⁶	Standard	Tandem Tray Model: 520 sheets x 2-tray + 840 sheets + 1,230 sheets + Bypass Tray 90 sheets
	Optional	High Capacity Feeder B1: 2,000 sheets
	Max	Tandem Tray Model: 5,200 sheets (Tandem Tray Model + High Capacity Feeder B1)
Output Tray Capacity* ⁷	Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF)	
Power Supply	AC220-240 V ±10%, 10 A, 50/60 Hz common	
Maximum Power Consumption	2.2k W (AC220 V) 2.4k W (AC240 V) Sleep mode: 0.5 W (AC230 V) Ready mode: 92 W (AC230 V)	
Dimensions	W 620 x D 720 x H 1,119 mm / W 24.4 x D 28.4 x H 44.1"	
Weight* ⁸	125 kg / 276lb. (Tandem Tray Model: Model-CPS-TTM)	

*1: The Storage Device Capacity is not totally available for customers.

*2: Embedded Plug-ins / Custom Services are enabled as factory default. You can change the settings if needed.

*3: Up to A3 size.

*4: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.

*5: The speed may be reduced due to the image quality adjustment.

*6: 80 gsm paper.

*7: 70 gsm paper.

*8: Excluding Toner Cartridge.

Print Function

Item	Description
Type	Built-in type
Continuous Print Speed* ¹	Same as the Basic Specifications / Copy Function
Printing Resolution	Standard [PCL Driver] Standard: 1,200 x 2,400 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi
	Optional [Adobe® PostScript® 3™ Driver] High Speed (Standard): 600 x 600 dpi, High Quality: 1,200 x 2,400 dpi, High Resolution: 1,200 x 1,200 dpi
Page Description Language	Standard PCL5 / PCL6
	Optional Adobe® PostScript® 3™
Supported Operating System* ²	Standard [PCL Driver] Windows 11 (64 bit), Windows 10 (32 bit / 64 bit) Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2022 (64 bit), Windows Server 2016 (64 bit), [Mac OS X Driver] macOS 14 / 13 / 12 / 11 / 10.15
	Optional [Adobe® PostScript® 3™ Driver] Windows 11 (64 bit), Windows 10 (32 bit / 64 bit) Windows Server 2022 (64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit) macOS 14 / 13 / 12 / 11 / 10.15
Interface	Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB3.0
	Optional Wireless LAN (IEEE 802.11a / b / g / n / ac)

*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

*2: Please refer to our official website for the latest supported OS.

Scan Function

Item	Description
Type	Color Scanner
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi
Scan Speed	Same as the Scan Speed for the Duplex Automatic Document Feeder
Interface	Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T
	Optional Wireless LAN (IEEE 802.11a / b / g / n / ac)

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17", Long document (Longest 600 mm / 23.7")
Recording Paper Size	Max: A3, 11 x 17"; Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds*
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN)

* When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines/mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition.

Duplex Automatic Document Feeder B2-PC

Item	5570	4570
Original Size / Paper Weight	Max: A3, 11 x 17"; Min: A6* ¹ 38 to 128 gsm / 11 lb. bond to 34 lb. bond (In Duplex: 50 to 128 gsm / 14 lb. bond to 34 lb. bond) * ²	
Capacity* ³	130 sheets	
Scan Speed* ⁴	Copy (A4 LEF, Simplex)	55 ppm
	Scan	45 ppm
	B/W: 80 ppm, Color: 80 ppm (1 pass, 2 sided scanning: B/W 160 ppm, Color 160 ppm) [Standard Document (A4 LEF / Letter LEF), 200 dpi, to Folder]	

*1: The minimum custom size is 49 x 85 mm / 2.0 x 3.4".

*2: Custom sizes from 49 x 85 mm to 55 x 91 mm are available from 38 to 209 gsm.

*3: 70 gsm paper.

*4: The scanning speed varies depending on the documents.

High Capacity Feeder B1 (Optional)

Item	High Capacity Feeder B1
Paper Size	A4 LEF, Letter LEF, JIS B5 LEF
Paper Weight	55 to 216 gsm / 15 lb. bond to 57 lb. bond
Feeding Capacity / Number of Tray*	2,000 sheets x 1-tray
Dimensions	W 389 x D 610 x H 377 mm / W 15.4 x D 24.1 x H 14.9"
Weight	29 kg / 64 lb.

*: 80 gsm paper.

Finisher-B4 (Optional)

Item	Finisher-B4
Type	Sort (Offset available**2) / Stack (Offset available**2)
Paper Size*3	Max: A3, 11 x 17"; Min: A5
Paper Weight*4	52 to 300 gsm / 14 lb. bond to 111 lb. cover
Paper Capacity*5	[Without Stapling] A4: 2,000 sheets, JIS B4 or larger: 1,000 sheets, Mixed Size Stacking*6: 300 sheets [With Stapling] A4: 100 sets or 1,000 sheets*7, JIS B4 or larger: 75 sets or 750 sheets [With Booklet Finishing*8] 50 sets or 600 sheets [With Fold*9] 500 sheets
Staple	Capacity 50 sheets (90 gsm or less)
	Paper Size*9 Max: A3, 11 x 17"; Min: A5 LEF
	Paper Weight 52 to 256 gsm / 14 lb. bond to 142 lb. index
	Position Single stapling, Dual stapling
Punch*10	Number of Holes 2-hole / 4-hole punch
	Paper Size*11 Max: A3, 11 x 17"; Min: A5 LEF
	Paper Weight 52 to 220 gsm / 14 lb. bond to 122 lb. index
	Capacity Saddle Staple: 15 sheets; Single Fold: 5 sheets
Booklet Finishing*8	Paper Size Max: A3, 11 x 17"; Min: A4, Letter
	Paper Weight Saddle Staple: 64 to 80 gsm / 18 lb. bond to 21 lb. bond*12, Single Fold: 64 to 105 gsm / 18 lb. bond to 28 lb. bond
Dimensions*13	W 592 x D 653 x H 1,041 mm / W 23.3 x D 25.7 x H 41.0" With Booklet Maker Unit: W 592 x D 673 x H 1,076 mm / W 23.3 x D 26.5 x H 42.4"
Weight	26 kg / 58 lb. Punch Kit: + 2 kg / 5 lb. Booklet Maker Unit: + 10 kg / 22 lb.

- *1 : The offset feature is set to disabled by factory default. The setting can be changed as necessary.
- *2 : Outputs whose weight is 257 gsm and more or width is less than 210 mm are delivered without offset stacking.
- *3 : Paper in the sizes larger than A3 or 11 x 17" or smaller than A5 are delivered to the Centre Tray.
- *4 : Documents may not be printed correctly depending on usage conditions. (52 to 55 gsm, 257 gsm and more)
- *5 : 70 gsm paper.
- *6 : When larger size sheets are stacked on top of smaller size sheets.
- *7 : 75 sets or 750 sheets with dual stapling.
- *8 : The Booklet Finishing function requires the optional Booklet Maker Unit for Finisher-B. Make a crease allows you to fold easily. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray.
- *9 : Available staple positions vary depending on the paper size.
- *10: The Punch function requires the optional 2/4 Hole Punch Kit for Finisher-B.
- *11: Available number of punch holes varies depending on the paper size.
- *12: Covers can be up to 220 gsm (Extra Heavyweight).
- *13: Inner connector within the body is excluded.

Finisher-C4, Finisher-C4 with Booklet Maker (Optional)

Item	Finisher-C4	Finisher-C4 with Booklet Maker
Type	Output Tray	Sort (Offset available) / Stack (Offset available)
	Finishing Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	– Sort / Stack
Paper Size	Output Tray	Max: 12 x 19" (305 x 483 mm), A3; Min: A6, Postcard (100 x 148 mm)
	Finishing Tray	Max: 12 x 19" (305 x 483 mm), A3; Min: A5 LEF
Paper Weight	Output Tray	52 to 300 gsm / 14 lb. bond to 111 lb. cover*1
	Finishing Tray	52 to 300 gsm / 14 lb. bond to 111 lb. cover*1
Paper Capacity*2	Output Tray	500 sheets (A4)
	Finishing Tray	[Without Stapling] A4: 3,000 sheets, JIS B4 or larger: 1,500 sheets, A5 LEF: 1,000 sheets, Mixed Size Stacking*3: 300 sheets [With Stapling] A4: 200 sets or 3,000 sheets JIS B4 or larger: 100 sets or 1,500 sheets A5 LEF: 100 sets or 1,000 sheets Mixed Size Stacking*3: 70 sets or 200 sheets
		[Without Stapling] A4: 1,500 sheets, JIS B4 or larger: 1,500 sheets, A5 LEF: 1,000 sheets, Mixed Size Stacking*3: 300 sheets [With Stapling] A4: 200 sets or 1,500 sheets JIS B4 or larger: 100 sets or 1,500 sheets A5 LEF: 100 sets or 1,000 sheets Mixed Size Stacking*3: 70 sets or 200 sheets
		20 sets*4
Staple	Booklet Tray	–
	Capacity	Staple: 50 sheets (90 gsm or less), 10 sheets (80 gsm or less)
	Paper Size*5	Max: A3, 11 x 17"; Min: A5 LEF
	Paper Weight	Staple: 52 to 300 gsm / 14 lb. bond to 111 lb. cover
Punch*6	Position	Single stapling, Dual stapling
	Number of Holes	2-hole / 4-hole punch
	Paper Size*7	Max: A3, 11 x 17"; Min: A5 LEF
	Paper Weight	52 to 220 gsm / 14 lb. bond to 122 lb. index
Booklet Finishing	Capacity*8	– Saddle Staple: 20 sheets (90 gsm or less) Single Fold: 5 sheets (90 gsm or less)
	Paper Size	– Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3; Min: JIS B5
	Paper Weight	– Saddle Staple: 60 to 300 gsm / 16 lb. bond to 111 lb. cover Single Fold: 60 to 300 gsm / 16 lb. bond to 111 lb. cover
	Dimensions*9	W 644 x D 692 x H 1,054 mm / W 25.4 x D 27.3 x H 41.5" W 649 x D 692 x H 1,054 mm / W 25.6 x D 27.3 x H 41.5"
Weight	Finisher-C4 (w Punch): 44 kg / 97 lb.	Finisher-C4 with Booklet Maker (w Punch): 57 kg / 126 lb.

Note: Transport Unit is required.

*1: 52 to 55 gsm output paper may not be aligned properly depending on the paper type.

*2: 70 gsm paper.

*3: When larger size sheets are stacked on top of smaller size sheets.

*4: When the output paper size is the same.

*5: Available staple positions vary depending on the paper size.

*6: Punching function cannot be added. Select a finisher with the hole punching function.

*7: Available number of punch holes varies depending on the paper size.

*8: The maximum number of sheets varies depending on the paper weight. Booklet may not be tightly closed depending on the size or type of the paper.

*9: Inner connector within the body is excluded.

Folder Unit CD3 (Optional)

Item	Description
Z Fold Half Sheet	Paper Size A3, 11 x 17", JIS B4
	Paper Weight 60 to 90 gsm / 16 lb. bond to 24 lb. bond
Tri-fold	Paper Size A4, Letter
	Paper Weight 60 to 90 gsm / 16 lb. bond to 24 lb. bond
	Paper Capacity*1 40 sheets
Power Supply*2 / Maximum Power Consumption	AC220-240 V +/- 10 %, 0.6 A, 50/60 Hz common, 144 W
Dimensions	W 232 x D 588 x H 991 mm / W 9.2 x D 23.2 x H 39.1"
Weight	52 kg / 115lb.

Note: Optional of Finisher-C4 / Finisher-C4 with Booklet Maker.

*1: 70 gsm paper.

*2: Power supply separate from the main unit is required.

Notes

- 1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall "the company" be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

Hardware configuration

Standard value

Apeos 5570/4570



Tandem Tray Module

- 520 sheets capacity tray x 2-tray
- 840 sheets capacity tray x 1-tray
- 1,230 sheets capacity tray x 1-tray

2 ways output tray
Allows to separate the print output each copy, fax and print job



1. Duplex Automatic Document Feeder B2-PC

- 130 sheets capacity
- Scan Speed:
(1 sided scanning) B/W: 80 ppm, Color: 80 ppm
(2 sided scanning) B/W: 160 ppm, Color: 160 ppm

2. Exit 2 Tray

Feeder and Finishing Options



3. High Capacity Feeder B1
Increase paper capacity for high-volume output

- 2,000 sheets capacity tray x 1-tray



4. Finisher B4

- Single stapling, Dual stapling



5. Punch Unit

- 2-hole / 4-hole punch



6. Booklet Maker

- Saddle Staple



7. Finisher-C4 2/4H

- Single stapling, Dual stapling
- 2-hole / 4-hole punch



9. Folder Unit CD3

- Z-fold Half Sheet, Tri-fold



8. Finisher-C4 with Booklet Maker 2/4H

- Single stapling, Dual stapling, Saddle stapling
- 2-hole / 4-hole punch



9. Folder Unit CD3

- Z-fold Half Sheet, Tri-fold



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

FUJIFILM

FUJIFILM Business Innovation Corp.

Headquarters

9-7-3, Akasaka Minato-ku, Tokyo 107-0052

TEL: +81-3-6271-5111

fujifilm.com/fbglobal

Distributor

Fujifilm India Private Limited

Unitech Cyber Park, Unit No. 801-807, 8th Floor, Tower C, Sector 39,

Gurugram- 122001, Haryana, India

TEL:+91-(0)124-4325500

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law :
•Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates.
•Unused postage stamps, post cards, etc.
•Certificate stamps stipulated by law.
•Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •Apeos is registered trademark or trademark of FUJIFILM Business Innovation Corp. •Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe Inc. in the United States and/or other countries. •Apple, Mac, macOS, OS X and AirPrint are trademarks of Apple Inc. registered in the U.S. and other countries and regions. •Mopria, the Mopria Logo, and the Mopria Alliance word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

Authorized Distributor: